

# Pi LV1



## Features

---



### Safe

- LFP Chemistry, Field-Proven BMS Integrated in Individual Module, DC Breaker & Fuse Adapted



### Scalable on Demand

- Flexible Configuration from 5.12 to 30.72 kWh per Stack, Up to 4 Stacks



### Powerful

- Up to 10.24kW Continuous Output



### Outdoor Rated Enclosure

- Water & Dust proof for Both Indoor and Outdoor



### Plug-and-play (15-min installation)

- Quick Connectors, Hand-wiring Free




### Smart

- Remote Upgrading & Monitoring

# Pi LV1

## Battery Module Unit:

Cell Type	LFP
Nominal Energy	5.12kWh
Nominal Voltage	51.2V
Voltage Range	47.5V~56.8V
Nominal Capacity	100Ah
Recommended Continuous Discharge Current	50A
Recommended Continuous Charge Current	50A
Certifications	CE,IEC62619, UL1973, UN38.3, UL9540, UL9540A

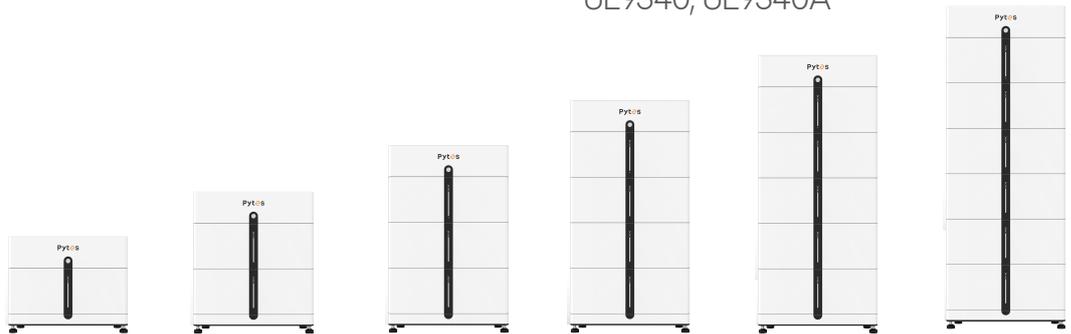

Model	Pi LV1-1	Pi LV1-2	Pi LV1-3	Pi LV1-4	Pi LV1-5	Pi LV1-6
Cell Type	LFP					
Nominal Voltage	51.2V					
Voltage Range	47.5V~56.8 V					
Depth of discharge	100%					
Usable Battery Capacity	100Ah	200Ah	300Ah	400Ah	500Ah	600Ah
Battery Max Charge/Discharge Current	50A	100A	150A	200A	200A	200A
Nominal Energy [1]	5.12kWh	10.24kWh	15.36 kWh	20.48 kWh	25.6 kWh	30.72 kWh
Recommended Power	2.56kW	5.12kW	7.68kW	10.24kW	10.24kW	10.24kW
Dimensions(L×W×H) (mm/inch)	681 x 242 x 540 26.8 x 9.5 x 21.3	681 x 242 x 800 26.8 x 9.5 x 31.5	681 x 242 x 1060 26.8 x 9.5 x 41.7	681 x 242 x 1320 26.8 x 9.5 x 52.0	681 x 242 x 1580 26.8 x 9.5 x 62.2	681 x 242 x 1840 26.8 x 9.5 x 72.4
Weight(kg/lbs)	71.7/158.1	125/275.6	178.3/393.1	231.6/510.6	284.9/628.1	338.2/745.6
Efficiency	≥ 95%					
Communication	CAN, RS485, WIFI, Dry Contact					
WiFi Module	Wifi frequency range:2412-2472MHz Wifi Max. transmission power<20dBm Bluetooth frequency range: 2402-2480MHz Bluetooth Max. transmission power<4dBm					
Warranty	10 years [2]					
Protection level	IP55 [3]					
Battery Max and Min Operating Temperature	Charge: 0° C ~ 57° C / 32° F ~134.6° F Discharge: -22° C~57° C / -7.6° F~134.6° F					
Ambient Temperature	0°C ~ 35°C					
Storage Temperature	Within 1 month: -20°C~50°C / -4°F~122°F 1~3 months: -10°C~40°C /14°F~104°F 3~12 months: 0°C~30°C /32°F~86°F					

[1]: 4 models parallel in Pi LV1 is Recommended. [2]: @25°C, 0.5C Charging/Discharging, 90% DoD,Cycle Life ≥ 6000Cycles.

[3]: Product can be installed both indoors and outdoors.

### Shanghai PYTES Energy Co., Ltd.

Factory Address: No. 3492 Jinqian Road, Fengxian District 21406 Shanghai PEOPLE'S REPUBLIC OF CHINA

Tel: +86 21 57475800

Email: [ess\\_support@pytesgroup.com](mailto:ess_support@pytesgroup.com)